



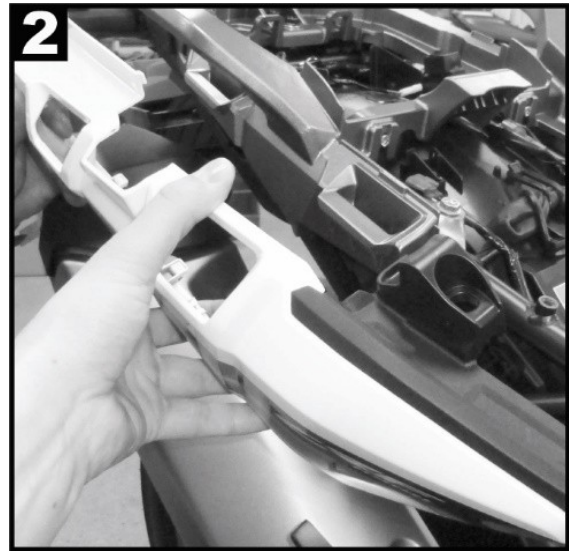

Instructions Addendum
2018+ Africa Twin Standard – Removing Plastic Covers

1. Remove the seat and the passenger seat.
2. Loosen the two screws for the passenger seat in the front area.
3. Remove the two front screws of the side rear fairing (Fig. 1) and remove the side fairing.
Caution, this is only clipped (Fig. 2).

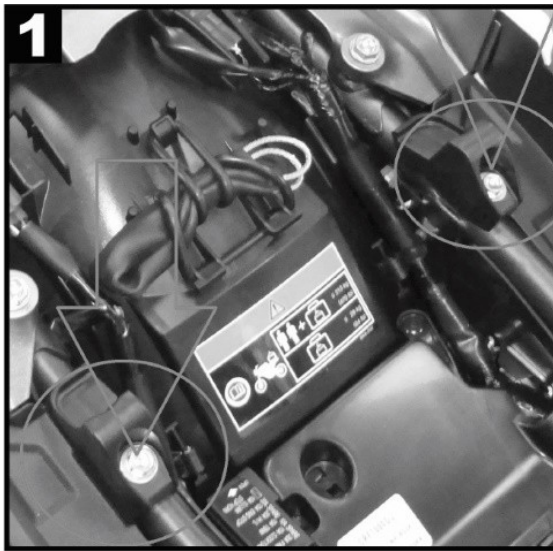

4. Remove the 6 original screws (Fig. 3) from the original rack and the two rear screws left and right next to the tail light (Fig. 4) and the rack.

